





A truly “quiet breed” of reliable power

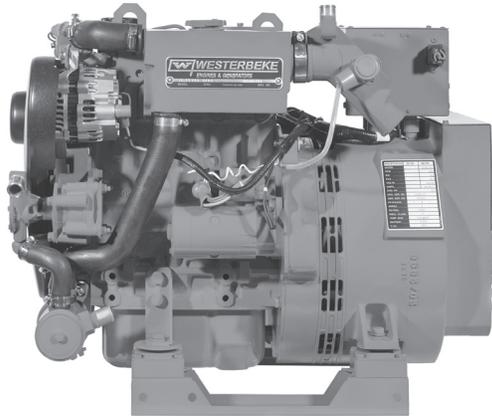

11.0/8.8 EGT Diesel Generator

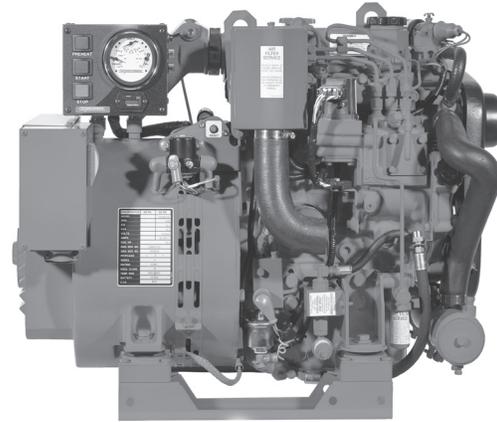

11.0/8.8 EGT Diesel Generator

Powerful & Reliable

Powered by a lightweight, rugged “industrial engine,” the 11.0 EGTD continues to support the strong record of reliability Westerbeke has built supplying product to the United States Navy and Coast Guard as well as commercial vessels and pleasure craft world-wide.

Smooth, Quiet Operation

The 11.0 EGTD provides 3-cylinder smoothness and a tuned air intake silencer for quiet, slow speed operation. In addition, standard electronic governing maintains the engine at a constant speed virtually eliminating “droop” when load is applied.

Longer Life and Easier Maintenance

The engine operates at a low 1800-rpm and is fresh water cooled, via heat exchanger, for longevity. The generator windings are NEMA class “H” insulated and double vacuum epoxy impregnated to increase protection against the harsh marine environment. Easy access servicing points and individually removable top and side panels of the optional sound enclosure contribute to easier maintenance.

Full Torque, Power Take-Off Interface

A customer sourced, electric clutch and hydraulic pump can be mounted to the full torque, power take-off interface for use with such items as bow or stern thrusters, compressors, winches and emergency “get home” systems.

Five Year Limited Warranty

This generator set is backed by Westerbeke’s 5-year limited warranty. The presence of Westerbeke in over 65 countries around the world provides customers with easy access to parts, service and technical support word-wide. Established in 1937, Westerbeke is committed to providing its customers with quality products and unequalled after sales support.

Standard Features

- Instrument panel with safety stop switch
- Remote start/stop plug-in connection
- Electronic governing
- Safety shut-downs: overspeed, underspeed, low battery voltage and low oil pressure, high exhaust and high coolant temperature
- A.C. circuit breaker (single phase)
- 50 amp battery charging alternator
- Power take-off interface
- Self-bleeding fuel system
- Fresh water cooling and coolant recovery tank
- 45 degree water injected exhaust elbow
- Gear driven raw water pump
- Tuned air intake silencer
- Anti-vibration mounts - fail safe rubber type
- Lube oil drain hose and drip tray
- Oil fill - top and side
- Belt guard
- Operators’ manual and parts list
- Complies with U.S. EPA regulations
- 5 year limited warranty

Instrument Panel



Generator Design

DESIGN: Brushless, four pole, revolving, power takeoff.
VOLTAGE REGULATION: Standard +/- 5% no load to full load.
FREQUENCY REGULATION: .5 Hz (.6%) no load to full load.
INSULATION: Class "H" as defined by NEMA MG1-1.65.

TEMPERATURE RISE: Within NEMA MG1-22.40 definition when operating at full load.

COOLING: Cast centrifugal blower, direct connected.

ELECTROMAGNETIC INTERFERENCE LEVEL: Exceeds requirements for most marine radio-telephones and standard TVs.

Model	Electrical Characteristics					Ratings		Engine	
	Volts	Amps	Hertz	Phase	Wire	Power Factor	KW	RPM	Start
11.0 EGTD-614	120/240	91.7/45.8	60	1	4	1.0	11.0	1800	Remote
8.8 EGTD-514	230	38.2	50	1	4	1.0	8.8	1500	Remote

Three phase units are available at these ratings.

Specifications

Number of cylinders	3 Cylinder vertical in-line		
Type	4 cycle		
Displacement	80.43 cu. in. (1.318 liter)		
Bore and stroke	3.07" x 3.62" (78.0 mm x 92.0 mm)		
Compression ratio	22:1		
Rated rpm @ 60/50Hz	1800/1500		
HP @ 1800 rpm	19 Standby / 17 Prime		
Maximum angle of operation	15 continuous, 30 intermittent		
Exhaust elbow connection	2" OD (50.8mm)		
Raw water connection	1" OD (25.4mm)		
Dry weight	522 lbs. (236.8 kg) approx.		
Combustion system	Swirl type		
Aspiration	Naturally aspirated		
Lubrication system	Forced lubrication by trochoid pump		
Cooling system	5 quarts (4.7 liters)		
Starting aid	12 volt sheathed type glow plug		
Fuel consumption (approx.)	1800 rpm	1500 rpm	
100% load GPH (LPH)	1.18 (4.5)	0.99 (3.7)	
75% load GPH (LPH)	0.88 (3.3)	0.74 (2.8)	
50% load GPH (LPH)	0.65 (2.5)	0.59 (2.2)	
25% load GPH (LPH)	0.46 (1.7)	0.40 (1.5)	
Fuel injection pump	Bosch type		
Governor	Electronic		
Injectors	Throttle type		
Fuel Filter	Primary and secondary		
Fuel transfer pump	12 volt electric type		
Fuel supply and return piping	1/4" ID (6.35 mm) minimum 3/8" ID (9.53 mm) maximum		

Lube oil filter	Full flow, spin-on element
Lubricant capacity	4.0 quarts (3.8 liters)
Starting motor	12 volt, solenoid, actuated shift
Alternator	50 amps (12 volts)
Cranking amps	240 @ 69 degrees F
Electrical system	12 volts DC, negative ground

Construction – Engine Components


Cylinder head	Cast Iron
Cylinder block	Cast Iron
Crankshaft	Forged crankshaft, four main bearings
Valves	Overhead rotating type
Fuel System	Self-bleeding
Intake system	Tuned intake silencer for maximum noise reduction
Cooling system	Fresh water-cooled with shell and tube type heat exchanger
Exhaust manifold	Cast aluminum, fresh water-cooled

Optional Equipment


- Dual station instrument panel with senders
- Remote start/stop panel
- Remote lube oil filter kit
- Sound Guard SST
- Hydro-hush muffler and fittings
- Fuel/water separator
- Anti-siphon valve with 1 inch stainless steel loop
- Ship-to-shore switch
- Power take-off adapter
- "A" on board spare parts kit; "B" extended cruising spare parts kit
- Hose Kit
- Generator set available painted white upon request (standard red)

Dimensions

Inches
(millimeters)

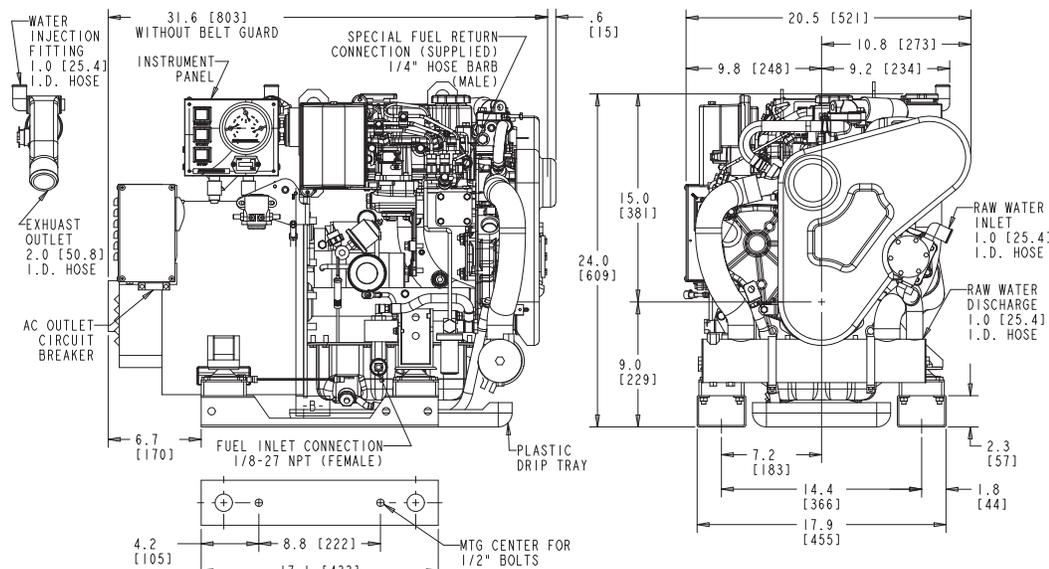

Optional Sound Guard SST PN 49483

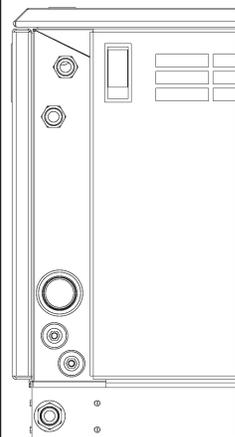

SST

Length: 36.1" (917mm)
 Width: 23.2" (589mm)
 Height: 25.3" (643mm)
 Weight: 83 lbs. (37kg)